

ChloriProtect®



Private
pools

Ensures safe chlorine production by the electrolytic salt cell and protects bar-supported covers

- Live display of the **redox (chlorine) value** in mV



- Adjustable electrolytic salt cell cut-off limit



- Optimal dosage:
Control of the electrolytic salt cell to prevent over-chlorination
Protects equipment (e.g. bar-supported covers, blinds and liners.)

SIMPLE

- Optimum ease of use: one function per button


SAFE

- The control output is protected against overloads by a 3,15A fuse (max. 700W).
- The difference in mV between the electrolytic cell start and stop is adjustable.

WARRANTY

- Device: two years

- Supplied with a **complete kit** for quick and easy installation:

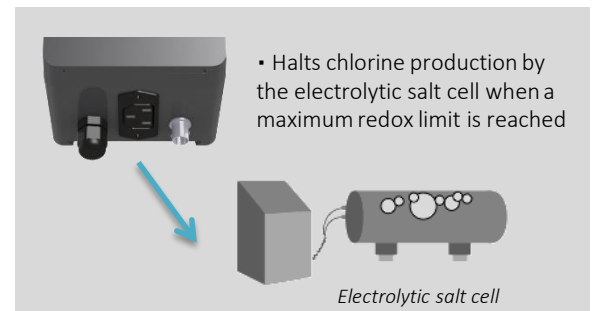

- Halts chlorine production by the electrolytic salt cell when a maximum redox limit is reached