

Physico pH[®] CLM

Simultaneously regulates pH and chlorine levels (ppm)
Suitable for campsites, hotels, residential complexes and balneotherapy facilities

Public
pools
ars

Hot
tubs

- Live display of the **chlorine content in ppm**, of the **pH value** and of the temperature (optional)



- Panel dimensions: 60 x 50 x 20 cm



- Equipped with a sensor compatible with stabiliser
- Professional analysis chamber

HIGH PERFORMANCE

- Quick response from the chlorine sensor, enabling regulation in small volumes of water (hot tubs, balneotherapy, pools).
- Accurate measurement of two parameters: pH (from 0 to 14) and chlorine (from 0 to 5 ppm)
- Closed amperometric sensor (not sensitive to pH) compatible with stabiliser (up to 80 ppm)
- Suitable for pools up to 1500 m³

SAFE

- Option: Jack input connectors for temperature detectors (AYAC100619)

WARRANTY

- Device: two years

SIMPLE


- Pre-assembled panel that is easy to wall-mount using the installation accessories provided

- Supplied with a **complete kit** for quick and easy installation:



Example of incorporation of Physico pH[®] CLM in a pool system

- Choice of pH and chlorine metering pump according to the volume of water to be treated

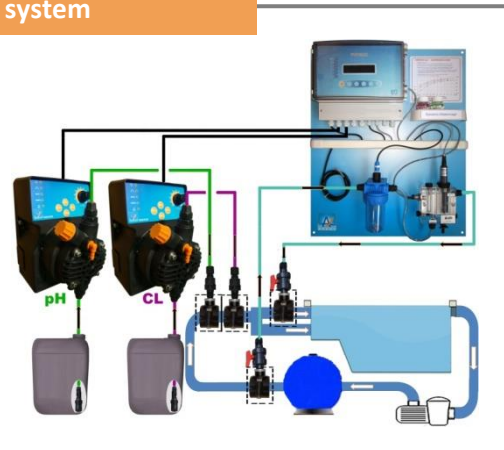

AYPA01C2002

AVADY POOL | 9 Chaussée Jules César · Bât 4 Hall 406 · 95520 OSNY · France

Tel.: +33 1 34 48 16 03 | contact@avadypool.com | www.avadypool.com

Users are responsible for ensuring that these products meet their needs.

