

# Turboxy<sup>®</sup> sensor






## Measurement of chlorine content (ppm)

Private pools

Public pools




- Information relayed via I2C, RS-232 or mV
- Easy installation: quarter-turn bayonet
- Regulation of:
  - Free chlorine in mg/l (ppm) 
  - Temperature 
  - Flow rate (flow switch) 
  - (electrodes not supplied)*
- O-rings to ensure leaktightness
- Measurement of free chlorine from 0 to 4 mg/l
- Compatible with stabiliser in the water (max. 50 ppm)


### Installation on a horizontal DN 50 pipe



### Installation in an analysis chamber

OR

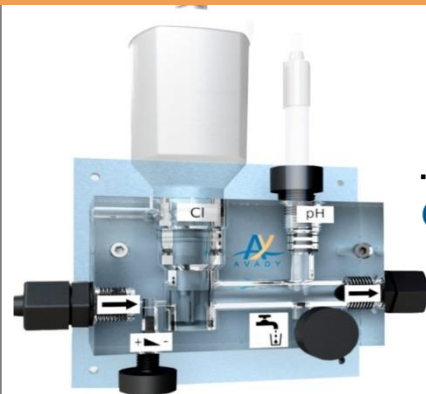

• Tests pH 

- Sampling valve for manual analyses
- Flow rate adjustment
- Panel dimensions: 17 x 15 cm

### Turboxy<sup>®</sup> remote tube kit



AYAC100385

AVADY POOL | 9 Chaussée Jules César · Bât 4 Hall 406 · 95520 OSNY · France

Tel.: +33 1 34 48 16 03 | contact@avadypool.com | www.avadypool.com

Users are responsible for ensuring that these products meet their needs.

