


PANchambre for Turboxy®



Enables installation of the Turboxy® sensor other than on a pipe

Private
pools

Public
pools

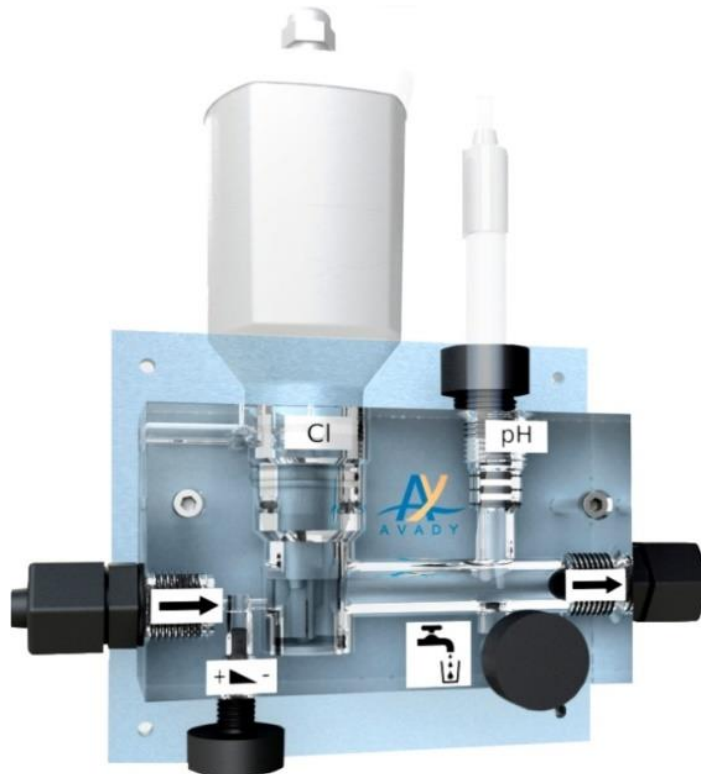

- Tests pH (electrode not supplied)



- Sampling valve for manual analyses
- Flow rate adjustment

- Panel dimensions: 17 x 15 cm

INNOVATIVE

Compact analysis chamber, simplified thanks to Turboxy® technology incorporating three functions:

- Measurement of free chlorine, temperature and flow rate. The pH electrode is fitted downline.
- Easy to maintain.

SAFE

- Integrated flow switch function

VERSATILE

- Suitable for use in hot tubs as well as public and private pools
- Compatible with:
 - Organic chlorine
 - Inorganic chlorine
 - Stabiliser up to 50 mg/L

- Supplied with a **complete kit** for quick and easy installation:



AYAC100486

AVADY POOL | 9 Chaussée Jules César · Bât 4 Hall 406 · 95520 OSNY · France

Tel.: +33 1 34 48 16 03 | contact@avadypool.com | www.avadypool.com

Users are responsible for ensuring that these products meet their needs.

