

PANchambre for Turboxy®



Allows Turboxy® probe to be installed outside pipework.

Private Pools


Public Pools



AYAC100486



Scan to discover

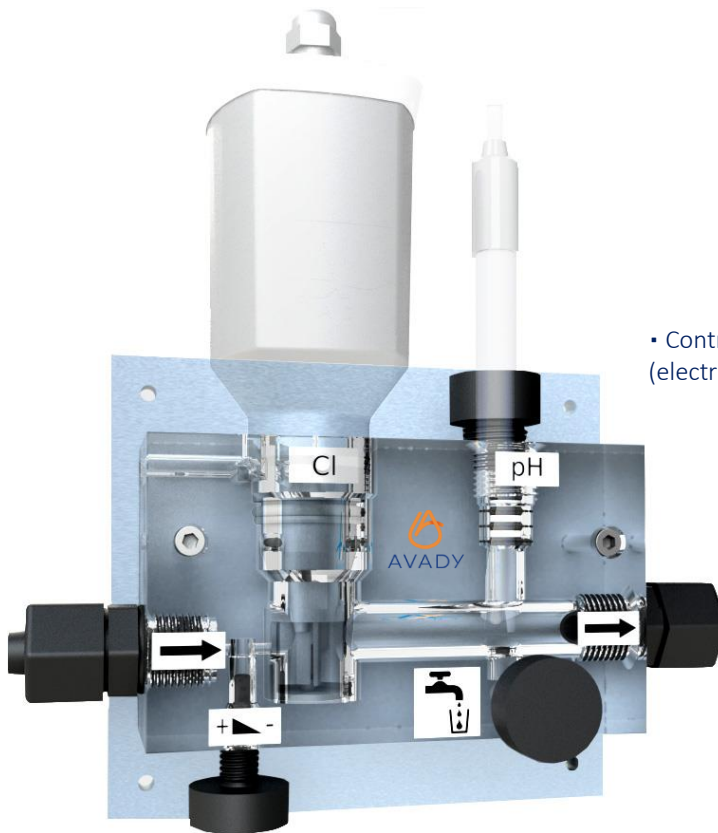

- Controls pH (electrode not supplied)



- Sampling valve for manual analysis
- Flow rate adjustment

• Panel size: 17 x 15 cm

INNOVATIVE

- Compact, simplified analysis chamber thanks to TURBOXY® technology that integrates three functions:
 - Free chlorine measurement, temperature and flow switch. The pH electrode is fitted next.
- Easy maintenance.

COMPLETE

- Supplied with a complete kit for quick and easy installation:



X 2
DN50



X 2
DN63



SAFE

- Integrated flow switch function.

POLYVALENT

- Can be used for Spas as well as public or private pools.
- Compatible with:
 - Organic chlorine,
 - Inorganic chlorine,
 - Up to 50 mg/L stabilizer.