



| Water treatment equipment for pools and spas made in France





“ Since 2011, at Avady, we draw on our proven experience to devise products with the capabilities needed and requested by individuals and professionals.

We create products to make life easier for pool users while ensuring that our systems are quick and straightforward for our installers to set up.”

MADE IN FRANCE

All of our products are created, designed and manufactured in France, thereby guaranteeing top performance and quality.

We have established close relationships with all our partners and thus benefit from their industrial experience and their skills in electronic, mechanical and hydraulic technologies, ensuring efficient and innovative working practices.

All Avady products are manufactured at our head office. For optimum efficiency, our selected suppliers are all local companies.

DESIGN AND INNOVATION

We dedicate more than 10% of our annual sales revenue to research and development of products that meet the needs and requirements expressed by the market. Our goal is to make our products even more efficient and innovative whilst ensuring that they remain easy to install and use.

SERVICES AND ADVICE

• **Assistance with equipment selection**

Our technical consultants draw on over 30 years of experience in water treatment to assist you in selecting the best equipment for your needs.

• **Dealer training**

We help our dealers increase their sales revenue, by providing sales and technical training for their staff and their customers.

• **After-sales service within 24/48 hours of receipt in the workshop**

We undertake to deal with all equipment received at Avady for after-sales service within no more than 48 hours.

• **Technical videos**

To help you during the installation and use of our products, we have compiled more than 350 technical videos. Available 24/7 on our website, it's a great tool to obtain information on many subjects.

Products table 2022	p. 4
Private pools	p. 6
Private & public pools	p. 8
Public pools	p. 12
Private spas	p. 14
Pumps	p. 15
Connected equipments	p. 16
Exclusive AVADY accessories	p. 18
Accessories	p. 20
Detached pieces	p. 22
Terms and conditions of sale	p. 23



Water treatment with total peace of mind | In order to guarantee healthy and balanced water in swimming pools and ponds, AVADY offers quality equipment, at the cutting edge of technology, easy to install and use to ensure the desired performance for everyone.

Product	Basin volume		Private SPAS	Publics SPAS	O ₂	RX (Cl/mv)	Cl (ppm, mg/l)	pH
TEMPO UV	≤ 150m ³ (O ₂)				Timmer			
	≤ 80m ³ (Cl)						Timmer	
PRIM pH	≤ 120m ³							✓
PRIM Rx	≤ 60m ³					✓		
ChloriProtect Rx	Oui					✓		
POOLEasy pH	≤ 150m ³		✓					✓
POOLEasy Rx	≤ 80m ³		✓			✓		
PROpilot pH Rx (1,5l/h)	≤ 150m ³		✓			✓		✓
PROpilot pH Rx (3l/h)	≤ 280m ³		✓			✓		✓
DUO pH Rx (1,5-3L/h)	≤ 150m ³	≤ 90m ³	✓			✓		✓
DUO pH Turboxy® (1,5-3L/h)	≤ 150 m ³	≤ 90m ³					✓	✓
PANDuo pH Rx	≤ 150 m ³	≤ 90m ³				✓		✓
PANDuo pH Turboxy® (1,5-3L/h)	≤ 150m ³	≤ 90m ³					✓	✓
PANDuo pH CLM (1,5-3L/h)		≤ 30m ³	≤ 30m ³	≤ 30m ³			✓	✓
PANpilot pH Rx S20 (3-8L/h)	30 à 300m ³	30 à 220m ³				✓		✓
PANpilot pH Turboxy® S20 (3-8L/h)	≤ 300m ³	≤ 220m ³					✓	✓
PANmagnet pH Rx S20 (8-8L/h)	30 à 450m ³	30 à 250m ³				✓		✓
Physico pH® Rx		30 à 300m ³					✓	✓
Physico pH® Turboxy®		≤ 1500m ³					✓	✓
Physico pH® CLM		≤ 1500m ³	✓	✓			✓	✓
Duo Side pH Rx (1,5-1,5L/h)			≤ 30m ³			✓		✓
MAGNET S20 pH (8l/h)	30 à 900m ³	30 à 450m ³						✓
MAGNET S20 Rx (8l/h)	30 à 450m ³	30 à 250m ³				✓		

| PRODUCTS TABLE 2022

Private Pools

Public Pools

Proportional Dosage	Max stabilizer qty	Able to control Salt chlorinator	Digital display	Temperature display	Alarm	Web interface	Warranty (2 years)	pH/Rx probe warranty (1 year)	Page
			✓				✓		6
✓			✓		Mini-maxi		✓		6
✓	15 ppm		✓		Mini-maxi		✓		6
	15 ppm	✓	✓		Mini-maxi		✓		6
✓			✓		Volumétrique		✓	✓	7
✓	15 ppm		✓		Volumétrique		✓	✓	7
✓	15 ppm	✓	✓		Volumétrique	Kit	✓	✓	7
✓	15 ppm	✓	✓		Volumétrique	Kit	✓	✓	7
✓	15 ppm		✓		Volumétrique	Option	✓		8
✓	40 ppm		✓	✓	Volumétrique	Option	✓	✓	8
✓	40 ppm		✓	Option	Volumétrique	Option	✓	✓	9
✓	40 ppm		✓	✓	Volumétrique	Option	✓	✓	9
✓	80 ppm		✓	Option	Volumétrique	Option	✓	✓	10
✓	15 ppm		✓	Option	Volumétrique	Kit	✓	✓	10
✓	40 ppm		✓	✓	Volumétrique	Option	✓	✓	11
✓	15 ppm		✓		Temporisé		✓	✓	11
✓	40 ppm	✓	✓	Option	Volumétrique	Option	✓	✓	12
✓	40 ppm		✓	✓	Volumétrique	Option	✓		12
✓	80 ppm	✓	✓	Option	Volumétrique		✓	✓	13
✓	15 ppm		✓		Volumétrique	Option	✓		14
✓			✓	✓	Temporisé		✓		15
✓	15 ppm		✓	✓	Temporisé				15

*Option = device predisposed to receive the AvadyConnect® option (already contains the extension) / Kit = device that can be expanded with the AvadyConnect® communication kit.

TEMPO UV®

Universal timed dosing pump for the injection of active oxygen, chlorine or flocculent.

Suitable for pools $\leq 150\text{m}^3$ (O_2) | $\leq 80\text{m}^3$ (chlorine)



TEMPO UV® and its complete kit

AYPO15003



PRIM® pH ou Rx

Proportional regulation of pH- / pH+ or chlorine pool concentration (mV) with Rx version.

The pump stops dosing if the value is too low or too high and displays the status.

Suitable for pools from 20 to 120m³ (pH) | from 20 to 60m³ (chlorine)



PRIM® pH and its complete kit

AYPO15001

PRIM® Rx and its complete kit

AYPO15002



ChloriProtect® Rx

Ensures safe chlorine production from the salt chlorinator and protects equipment such as bar-supported covers, automatic covers or liners. Display of the chlorine content in mV.



ChloriProtect® Rx and its complete kit

AYPO15009



Find all the steps of installation and use of our devices in the videos section of our website.

POOLeasy® pH/Rx

Automatically regulates pH or chlorine (mV).


Supplied with a 2 in 1 probe holder that can be mounted horizontally or vertically and is suitable for diameter 50 and 63.

The volumetric alarm ensures that chemical containers never run dry.

Suitable for pools from 1 to 150m³ (pH version) ; from 1 to 80m³ (Rx version)



POOLeasy® pH and its complete kit	AYPO16001
POOLeasy® Rx and its complete kit	AYPO16003



2 in 1 probe holder*

PROpilot pH® Rx

Simultaneously regulates pH and chlorine levels (mV).

External injection of chlorine via activation of dosing pump, salt chlorinator or solenoid valve.

Supplied with a 2 in 1 probe holder that can be mounted horizontally or vertically and is suitable for diameter 50 and 63.

The volumetric alarm ensures that chemical containers never run dry.

Communication kit AvadyConnect® : remote access to swimming pool data through www.avadyconnect.com (p14).


Suitable for pools from 1 to 150m³ (1,5l/h) ; from 1 to 280m³ (3l/h)



PROpilot pH® Rx 1,5L/h and its complete kit	AYPO16002
PROpilot pH® Rx 3L/h and its complete kit	AYPO16004
AvadyConnect® Communication Kit	AYAC100524



Optional kit



2 in 1 probe holder*

*Find all information about the 2 in 1 probe holder on page 18

DUO pH Rx (1,5-3L/h)

Simultaneously regulates and injects pH and chlorine (mV).

Included pumps : 1,5L/h pH and 3L/h chlorine.

Supplied with 2 x 2 in 1 universal probe holders that can be installed horizontally or vertically and adapt to 50 to 63 mm diameters.

The Volumetric alarm ensures that chemical containers never run dry.

AvadyConnect® communication kit : remote access to swimming pool data through www.avadyconnect.com (p14).

Suitable for private pools ≤ 150m³

Suitable for public pools ≤ 90m³

Suitable for hotels, residential complexes, house rentals.



Optional kit

DESIGN
INNOVATION



DUO pH® Rx (1,5-3L/h) and its complete kit

AYPO16108



AvadyConnect® Communication Kit

AYAC100524

DUO pH Turboxy (1,5-3L/h)

Simultaneously regulates and injects pH and chlorine (ppm - amperometric sensor).

Turboxy Probe : water temperature display + water flow measurement.

Included pumps : 1,5L/h pH and 3L/h chlorine.

Supplied with a 2 in 1 universal probe holders that can be installed horizontally or vertically and adapt to 50 to 63 mm diameters.

The flange of the Turboxy probe is suitable for horizontal DN50 installation only or use the Turboxy remote tube kit.

The Volumetric alarm ensures that chemical containers never run dry.

Device predisposed to receive the AvadyConnect® option : data consultation and remote control on www.avadyconnect.com (p14).

In compliance with requirements dictated by the French Health Authorities.

Suitable for private pools from 15 to 150m³, public pools from 15 to 90m³, hotels, residential complexes, house rentals.



Find out more about DUO pH Turboxy® on the presentation video available on our website.



Optional

DESIGN
INNOVATION



DUO pH® Turboxy (1,5-3L/h) and its complete kit

AYPO16125



AvadyConnect® Option

AYAC100383

Turboxy® remote tube Kit

10000020



Turboxy® remote tube kit

Strongly recommend for an optimal operation*

*Find all information about the Turboxy® remote tube kit on page 19

PANduo pH Rx (1,5-3L/h)



Simultaneously regulates and injects pH and chlorine (mV).
Included pumps : 1,5L/h pH and 3L/h chlorine.
Optional water temperature.
The analysis chamber allows for easier checks and interventions.
Its sampling valve facilitates manual analysis.
The volumetric alarm ensures that chemical containers never run dry.

Device predisposed to receive the AvadyConnect® option : remote access to swimming pool data through www.avadyconnect.com (p14).

*Suitable for private pools $\leq 150m^3$
Suitable for public pools $\leq 90m^3$
Suitable for guesthouses, residences, gîtes.*



DESIGN
INNOVATION

	PANduo pH® Rx (1,5-3L/h) and its complete kit	AYPA1121
	AvadyConnect® Option	AYAC100383
	Temperature Option	AYAC100605

PANduo pH Turboxy (1,5-3L/h)



Simultaneously regulates and injects pH and chlorine (ppm - amperometric sensor).
Included pumps : 1,5L/h pH and 3L/h chlorine..
Turboxy Probe : water temperature display + water flow measurement.
The analysis chamber allows for easier checks and interventions as well as optimal use of Turboxy probe.
Its sampling valve facilitates mandatory manual analysis.
The volumetric alarm ensures chemical containers never run dry.

Device predisposed to receive the AvadyConnect® option : data consultation and remote control on www.avadyconnect.com (p14).
In compliance with requirements dictated by the French Health Authorities.

*Suitable for private pools $\leq 150m^3$
Suitable for public pools $\leq 90m^3$
Suitable for hotels, residential complexes.*



DESIGN
INNOVATION

	PANduo pH® Turboxy (1,5-3L/h) and its complete kit	AYPA1116
	AvadyConnect® Option	AYAC100383

PANduo pH CLM (1,5-1,5L/h)

Simultaneously regulates and injects pH and chlorine (ppm – closed amperometric sensor / membrane).

Included pumps : 1,5L/h pH and 1,5L/h chlorine.

Optional water temperature.

The analysis chamber allows for easier checks and interventions.

Its sampling valve facilitates mandatory manual analysis.

The volumetric alarm ensures chemical containers never run dry.

Device predisposed to receive the AvadyConnect® option : data consultation and remote control on www.avadyconnect.com (p14).

In compliance with requirements dictated by the French Health Authorities.

Suitable for public pools and spas $\leq 30m^3$

Suitable for hotels, residences.



Optional

**DESIGN
INNOVATION**



PANduo pH® CLM (1,5-1,5L/h)
and its complete kit

AYPA1119



AvadyConnect® Option

AYAC100383

Temperature Option

AYAC100605

PANpilot pH Rx S20 (3-8L/h)

Simultaneously regulates and injects pH and chlorine (mV).

Included pumps: 3L/h pH and 8L/h chlorine.

Regroups the best of dosing pumps technology; persaltic pump for the pH and electromagnetic for the chlorine (ppm).

Optional water temperature.

The analysis chamber allows for easier checks and interventions.

Its sampling valve facilitates mandatory manual analysis.

The volumetric alarm ensures chemical containers never run dry.

Device predisposed to receive the AvadyConnect® option : remote access to swimming pool data through www.avadyconnect.com (p14).

Suitable for private pools from 30 to 300m³.

Suitable for public pools from 30 to 220m³.

Suitable for campsites, hotels, residences and requiring little stabilizer.



Optional



PANpilot pH® Rx S20 and its complete kit

AYPA1007



AvadyConnect® Option

AYAC100383

Temperature Option

AYAC100605

PANpilot pH Turboxy S20 (3-8L/h)

Simultaneously regulates and injects pH and chlorine (ppm – amperometric probe).

Included pumps: 3L/h pH and 8L/h chlorine.

Regroups the best of dosing pumps technology; persaltic pump for the pH and electromagnetic for the chlorine.

Turboxy Probe : water temperature display + water flow measurement.

The analysis chamber allows for easier checks and interventions as well as optimal use of Turboxy probe.

Its sampling valve facilitates mandatory manual analysis.

Volumetric alarm to prevent the emptying of chemical canisters.

Device predisposed to receive the AvadyConnect® option : data consultation and remote control on www.avadyconnect.com (p14).

In compliance with requirements dictated by the French Health Authorities.

Suitable for private pools $\leq 300m^3$

Suitable for public pools $\leq 220m^3$

Suitable for campsites, hotels, residential complexes.



Option



PANpilot pH® Turboxy S20 (3-8L/h)
and its complete kit

AYPA1017



Option AvadyConnect®

AYAC100383

PANmagnet® pH Rx S20

Simultaneously regulates and injects pH and chlorine (mV).

Included pumps: 8L/h pH and 8L/h chlorine.

Electromagnetic dosing pumps : resistant.

Dosing pumps equipped with noise reduction system.

The analysis chamber allows for easier checks and interventions.

Its sampling valve facilitates manual analysis.

Volumetric alarm ensures chemical containers never run dry.

Suitable for private pools from 30 to 450m³

Suitable for public pools from 30 to 250m³

Suitable for campsites, hotels, residential complexes – low stabilizer requirements.



PANmagnet® pH Rx S20 and its complete kit

AYPA1009

Physico pH® Rx

Simultaneously regulates and injects pH and chlorine (mV).
Optional water temperature.
The analysis chamber allows for easier checks and interventions.
Its sampling valve facilitates manual analysis.
Volumetric alarm ensures chemical containers never run dry.

Device predisposed to receive the AvadyConnect® option : data consultation and remote control on www.avadyconnect.com (p17).
In compliance with requirements dictated by the French Health Authorities.

Suitable for public pools up to 1500m³.



Option



Physico pH® Rx and its complete kit	AYPA1012
AvadyConnect® Option	AYAC100383
Temperature Option	AYAC100605

Physico pH® Turboxy

Simultaneously regulates and injects pH and chlorine (ppm – amperometric probe).
Turboxy Probe : water temperature display + water flow measurement.
The analysis chamber allows for easier checks and interventions as well as optimal use of Turboxy probe.
Its sampling valve facilitates mandatory manual analysis.
Volumetric alarm ensures chemical containers never run dry.

Device predisposed to receive the AvadyConnect® option : data consultation and remote control on www.avadyconnect.com (p14).
In compliance with requirements dictated by the French Health Authorities.

Suitable for public pools up to 1500m³.



Option



Physico pH® Turboxy and its complete kit	AYPA1002
AvadyConnect® Option	AYAC100383

Physico pH® CLM

Simultaneously regulates and injects pH and chlorine (ppm – closed amperometric sensor membrane).

Optional water temperature.

The analysis chamber allows for easier checks and interventions.

Its sampling valve facilitates mandatory manual analysis.

Volumetric alarm ensures chemical containers never run dry.

Device predisposed to receive the AvadyConnect® : data consultation and remote control on www.avadyconnect.com. (p17)

In compliance with requirements dictated by the French Health Authorities.

Suitable for pools $\leq 1500m^3$

Suitable for campsites, hotels, residential complexes, balneotherapy facilities.



Option



Physico pH® CLM and its complete kit	AYPA1018
AvadyConnect® Option	AYAC100383
Temperature Option	AYAC100605

Duo Side pH Rx (1,5-1,5L/h)

Simultaneously regulates and injects pH and chlorine levels(mV).

Included pumps : 1,5L/h pH and 1,5L/h chlorine.

« Retrofitting » kit : easy to install on existing spas.

Supplied with 2 x 2 in 1 universal probe holders that can be installed horizontally or vertically and adapt to 50 to 63 mm diameters.

Volumetric alarm ensures chemical containers never run dry.

Communication kit AvadyConnect® : remote access to swimming pool data through www.avadyconnect.com (p14).

Suitable for pools $\leq 30m^3$

Suitable for hotels, residential complexes, house rentals.



Optional kit



Duo Side pH Rx (1,5-1,5L/h) and its complete kit

AYPO16009

AvadyConnect® Communication Kit

AYAC100524

PeriFix pumps

Compact, reliable and easy to use peristaltic pump. *(not for use with hydrochloric acid).*



PeriFix 1,5L/h and its complete kit • until 50m ³	AYPO15017
PeriFix 3L/h and its complete kit • until 80m ³	AYPO15020

MAGNET pumps

Electromagnetic dosing pump: **automatically** dose treatment products in swimming pools when combined with a pH or chlorine regulator. Reinforced and acid-resistant polypropylene casing. Easy to use and maintain



MAGNET S10 2L/h at 3 bars and its complete kit	AYPO241002039A020
▪ up to 60m ³ (int); 40m ³ (ext)	
MAGNET S10 6L/h at 3 bars and its complete kit	AYPO241006039A020
▪ up to 180m ³ (int); 120m ³ (ext)	



MAGNET S20 8L/h at 3 bars and its complete kit	AYPO231008039C030
▪ up to 300m ³ (int); 240m ³ (ext)	
MAGNET S20 12L/h at 3 bars and its complete kit	AYPO231012039C010
▪ up to 400m ³ (int); 360m ³ (ext)	



MAGNET S40 50L/h at 3 bars and its complete kit	AYPO281050037C010
▪ until 1500m ³	

INSTRUMENT pumps pH/Rx

Electromagnetic dosing pump : allows **proportional** dosing of required treatment products in swimming pools. Backlit display. Reinforced and acid-resistant polypropylene casing. Easy to use and maintain.



MAGNET S20 pH 8L/h and its complete kit	AYPO232008039A010
▪ until 480m ³	
MAGNET S20 Rx 8L/h and its complete kit	AYPO233008039A010
▪ until 250m ³	

Connectivity has taken a central role in consumers and professionals daily lives. Therefore, Avady has developed a range of tools allowing to easily manage equipments by knowing their status and modify all connected parameters. **Welcome to the connected swimming pool area!**

MasterBox®

MasterBox® comprises all electrical and support protection devices, as well as smart management of filtration and the following additional components: filtration, water treatment system (pH and chlorine regulators), lighting, heating and booster pump. It also serves to view the status of the covers.

Masterbox is accessible by **Bluetooth** via an application.

Equipped with an AvadyConnect® kit, it also offers users the option to manage and control their equipment remotely.



MasterBox® includes the following items :

- 1 pre-powered terminal block containing all the connections to the external elements
- 2 relays with digital intelligent thermal protection
- 30 mA protection and short-circuit protection



MasterBox®

AYCOF001

Communication Kit AvadyConnect®


The communication kit AvadyConnect® allows remote control and monitoring of the water treatment equipment for easy pool management, via the dedicated web interface www.avadyconnect.com.

The kit includes 2 items :

- A dongle to be connected to the Ethernet network, allowing radio communication (AvadyConnect® Option)
- An extension card to be installed in the device to enable communication with the AvadyConnect® option.

Compatible with :

Propilot pH Rx, DUO pH Rx, PANduo pH Rx, PANpilot pH Rx S20, DUO SIDE pH RX

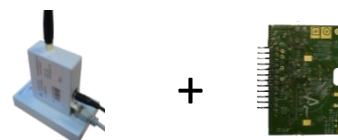

Communication Kit AvadyConnect®



AvadyConnect® Option



AvadyConnect® Extension

Communication kit AvadyConnect®

AYAC100524



AvadyConnect® Option

AYAC100383



AvadyConnect® Electronic card

AYAC100345B

| Interface web www.avadyconnect.com



Remote control and coordination of :

- Regulation of pH and chlorine levels
- Low level of treatment products*,
- Temperature*,
- Operation of the filtration pump and booster pump*,
- Lighting*,
- Equipment status, e.g cover*,
- Alerts and advices via email.


* Depending on the connected device.

My pools

Deploying 1-10 of 32 results

Swimming pool	Customer	Avadyconnect Dongle serial number	pool.alarmlevel
Ma piscine à moi	Yvanica Yvanica	D88039927E70	2
Piscine BUREAU	Yvanica Yvanica	D88039923721	2
Piscine 2	Denis	D88039922A2E	1
piscine baignoire	laurent Le mouleux	D88039052807	1
LE PIC	Jovet	D880390518F3	1
Piscine Camp Redon	Andries Holsappel	D88039055A39	1
CADELL	Luis DA COSTA	D8803905080D	0
Grand bassin 2	Younes Hery	D8803905080B	0
SPA DDU	Dominique Ducoeur	D88039053F00	0
essai radio 100mW	Dominique Ducoeur	D88039051AF8	0

List of managed pools

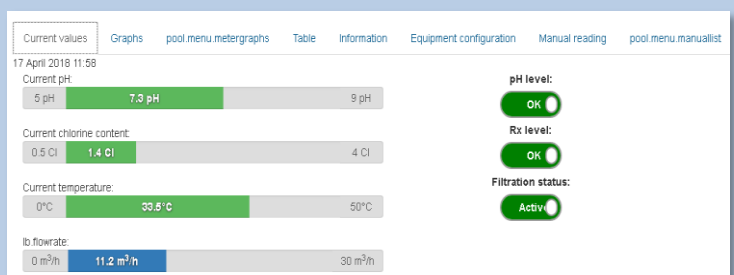

A single glance is enough :

If settings are green = safe to swim!

Current values | Graphs | pool.menu.metergraphs | Table | Information | Equipment configuration | Manual reading | pool.menu.manualist

pH configuration | Cl configuration | System | Admin. configuration

PROpilot values

SETPOINT VALUE: 1.4

TYPE OF OUTLET: External pump

PUMP FLOW RATE: 1.5 L/h

ACTIVATION TYPE: PROPORTIONAL

PUMP ACT. TIME: 40 s @ 1 Cl

OVERDOSING ALARM: 2.50 L/4h

ALARM DISABLED: OFF

READING ADJUSTMENT: 0.00 Cl

OVERDOSING ALARM: No


Web configuration

lb.entity.high_alm: Yes

lb.entity.low_alm: Yes

lb.entity.lvl_alm: No

Remote adjustment of pH and chlorine settings

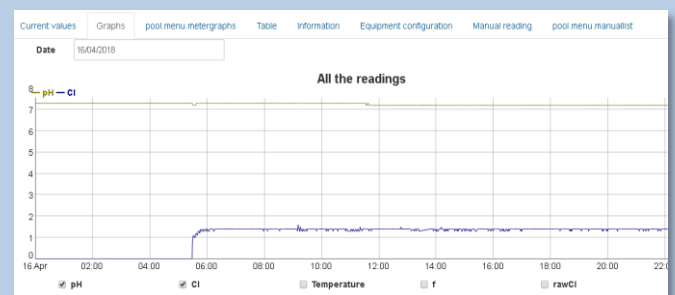


Historical data

| TAKE A LOOK at the interface at www.avadyconnect.com with the username and password « demo ».


2 in 1 Probe holder

A single point for measurement and injection.
Fully protected sensor thanks to the probe holder tubing.
A wintering plug is supplied to replace the sensor in the probe holder.
Compatible with DN50 and DN63 pipes.
Horizontal or vertical assembly.

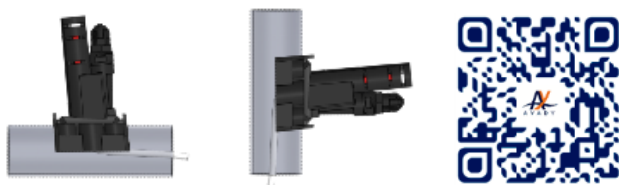

2 in 1 probe holder

AYFA00011

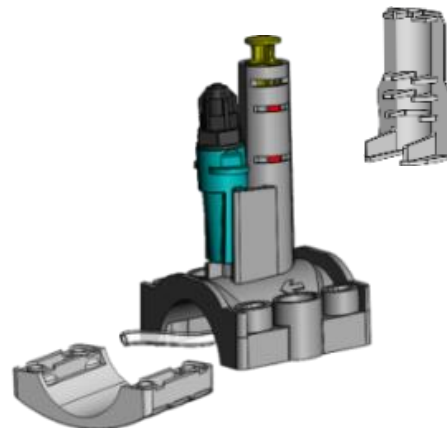

CRISTALstop® injector

Suitable for 2 in 1 probe holder.
Limit the crystallization at the chlorine injection point.
Increase the peristaltic pump lifetime.

CRISTALstop® injector

AYFA00006

Maintenance kit CRISTALstop® (x3)

AYAC100502



Turboxy® probe

The only amperometric probe capable of being installed directly on the pipe.
Chlorine reading in ppm.
Stabilizer tolerance up to 40ppm.
Very easy to maintain.

Turboxy® amperometric probe

AYAC08F00



Turboxy® remote tube kit

Facilitates the installation of the Turboxy probe and allows an installation in DN63. Allows to control the speed of the water passing through the Turboxy probe.

This kit is strongly recommend for an optimal operation of the Turboxy probe. It can be used to correct many problems such as a low flow rate, pressure drop, or lack of space in the pipe.



Turboxy® remote tube kit

10000020

Analysis chamber for pH sensor and Turboxy® chlorine

Allows a better management of the Turboxy® probe.

Gives better samples, nearer to the sensors

** Sensors not included*



**Turboxy® analysis chamber
and its complete kit**

AYAC100486

Analysis chamber for pH et Redox sensors

Gives better samples, nearer to the sensors.

** Sensors not included*



**Analysis chamber without flow switch
and its complete kit**

AYAC100518

**Analysis chamber with flow switch
and its complete kit**

AYAC100519

Sensors



1. pH Sensor Length 80mm · Cable 1m	AYAC08AB01
1. pH Sensor Length 80mm · Cable 5m (POOleasy pH, PROpilot, Duo pH Rx, Duo pH Turboxy))	AYAC08AC01
1. pH Sensor Length 120mm · Cable 1m (PANpilot, PANduo, PANmagnet, Physico)	AYAC08AB00
1. pH Sensor Length 120mm · Cable 5m (PRIM pH, Magnet S20 pH)	AYAC08AC00
2. Rx Sensor Length 120mm · Cable 1m (PANpilot pH Rx, PANduo pH Rx, PANmagnet, Physico pH Rx)	AYAC08BB00
2. Rx Sensor platinum Length 80mm · Cable 5m (POOleasy Rx, Duo pH Rx)	AYAC08BC01
2. Rx Sensor platinum Length 120mm · Cable 5m (PRIM Rx, Magnet S20 Rx)	AYAC08BC00
2. Rx Sensor Length 120mm · Cable 5m (PROpilot, Chloriprotect)	AYAC08BC05
3. Amperometric probe Turboxy® and installation kit	AYAC08F00
4. CLM probe free chlorine organic/non-organic	AYAC08DG4

Sensor maintenance



1. Cleaning Solution pH/Rx sensor 250mL	AYACSOLNET02
2. Storage solution pH/Rx sensor 100mL	AYACSOLSTK01
3. Standard solution pH7 100mL	AYAC02C002
4. Standard solution pH4 100mL	AYAC02C001
5. Standard solution 475mV 100mL	AYAC02C004
6. Gel fresh and salt water for CLM probe	AYAC09AA0002
7. Membrane for CLM probe free chlorine organic/non-organic	AYAC09AA0001
8. Maintenance Kit Turboxy®	AYAC100347
8. Maintenance Kit Turboxy® Abrasive B10	10000019



1. Santoprene Peristaltic Tube 6*9mm (1,5L/h et 3L/h)	AYAC100152
1. Santoprene Peristaltic Tube 7*3mm (0,5L/h)	AYAC100179
1. Cristalsil Tube 6,3*9,5mm · length 140mm (1,5L/h)	AYAC100479
2. Injection Valve 1/2" · 4*6 (peristaltic pump)	AYACAC0002
3. Magnet Adaptor valve for 2 in 1 probe holder injector	AYAC100285
4. Injection Valve 1/2" et 3/8" · 4x6 et 10x14 (electromagnetic pump)	AYACAC0003
5. Probe holder with 1/2" inserts for 120mm probe	AYAC09CF07
6. Suction valve for Magnetic pump	AYAC100005
7. Suction valve for peristaltic pump	AYAC100020
8. Washable cartridge filter for panels	AYAC100006
9. Set of 5 foams for protection filter quick coupling	AYAC100638
10. Complete pump housing 2-15 L/H PVDF	AYAC100036
Kit Roller holder	AYAC100165



11. PVC Cristal tube 10*14 (10m)	AYAC100204
11. PVC Cristal tube 10*14 (50m)	AYAC100017
11. PVC Cristal tube 4*6 (25m)	AYAC100018
11. PVC Cristal tube 4*6 (100m)	AYAC100096
12. Polyethylene tube 10*14 (10m)	AYAC100129
12. Polyethylene tube 10*14 (50m)	AYAC100037
12. Polyethylene tube 4*6 (25m)	AYAC100016
12. Polyethylene tube 4*6 (100m)	AYAC100135
13. Polypropylene tube 8*10 (25m) for pannel connection	AYAC100644



14. Polyethylene Tank 60L	AYAC03A001
14. Polyethylene Tank 100L	AYAC03A002
14. Polyethylene Tank 200L	AYAC03A003
14. Polyethylene Tank 300L	AYAC03A004
14. Polyethylene Tank 500L	AYAC03A005
14. Polyethylene Tank 1000L	AYAC03A006
15. Security tank for 60 and 100L tank	AYAC04A001
15. Security tank for 200L tank	AYAC04A002
15. Security tank for 300 - 500L tank	AYAC04A004
15. Security tank for 1000L tank	AYAC04A005
16. Suction cane 4x6 H50 Jack plug	AYAC100353
16. Suction cane 4x6 H80 Jack plug	AYAC100503
16. Suction cane 4x6 H50 4 poles plug	AYAC100298
16. Suction cane 4x6 H80 4 poles plug	AYAC100501

1. PRICES - Price quoted are exclusive of VAT, transport or special packing unless otherwise agreed.

2. DELIVERY - Any time or date for delivery indicated by the Company, either in the quotation or in the order confirmation reply, shall be treated as a tentative only. Whilst every effort shall be made to deliver the goods on time, the Company will not accept any liability for failure to deliver within the indicated date and shall not be liable for any loss or damages arising directly or indirectly from such failure except as otherwise agreed by the Company with a written document.

3. PAYMENT - The terms of payment shall be stipulated at the time of the agreement or by the Company quotation of the Conditions of Sale; no rounding off, subtraction or discount can be accepted without the Company prior written consent. The Purchaser shall not be entitled to suspend or retain any part of the payment as counterclaims or for any dispute whatsoever, even if legitimate.

4. CLAIMS - Purchaser claims concerning the quantity, type and models of the goods supplied must be submitted within eight days of receiving date; claims concerning quality or damaged goods will be considered by the Company only within eight days of noticing the claim or defect. The Company will make every effort to replace or repair the goods at earliest time possible.

5. WARRANTY - The company provides a guarantee on its products for a limited period of 1 year or 2 years depending on the products. This excludes all wearing items such: valves, gaskets and seals, nozzle, tube nuts, tubing, filters, injection valves, non return valves, glass components (electrodes). Furthermore the warranty does not cover goods damaged because of: a) Use of the equipment contrary to the Company instructions. b) Improper installation. c) Repair, alteration and improper taking apart of the equipment without the Company written authorization. d) Damages caused by natural events and/or unexpected circumstances (e.g. thunders, fire, freeze, etc).

6. RETURN OF GOODS - The Company will not accept the return of goods without the prior approval and only after written consent of a Company authorized-person.

7. DISPUTES - Any returned goods must always be accompanied by the customer's official letter headed, delivery note. Under no circumstances will the Company accept returned goods that do not comply to the above indications. Any dispute arising with regards to the terms of the condition of sale shall be settled in the court of Pontoise 95300 – France, under french law and commercial customs.

WARNING - All the products are manufactured according to regulation. Standard electrical supply: 220/240 V / 50 - 60 Hz. Other power supplies upon request. Upon request CSA certification can be provided for some products (valid for USA/Canada).

*About this document: We have tried to make this document comprehensive and factual. We reserve the right to make changes at any time without notice, to prices, colors, materials, specifications, models and availability.
This document may have been updated since the time of printing.*



AVADY POOL

9 Chaussée Jules César · Bât 2 · Porte 221B | 95520 OSNY | FRANCE
+ 33 (0)1 34 48 16 03 | contact@avadypool.com | www.avadypool.com